

# PS4000 CS-F32-20-2

## Solar Surface Pump System

### System Overview

Head	max. 30 m
Flow rate	max. 43 m <sup>3</sup> /h

### Technical Data

#### Controller PS4000

- Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracking)

Power	max. 4,0 kW
Input voltage	max. 375 V
Optimum V <sub>mp</sub> *	> 238 V
Motor current	max. 15 A
Efficiency	max. 98 %
Ambient temp.	-30...50 °C
Enclosure class	IP54

#### Motor ECDRIVE 4000 CS-F

- Maintenance-free brushless DC motor
- Premium materials, stainless steel: AL/AISI 304

Rated power	3,5 kW
Efficiency	max. 92 %
Motor speed	900...3.300 rpm
Insulation class	F
Enclosure class	IPX4


#### Pump End PE CS-F32-20-2

- Premium materials

#### Pump Unit PU CS-F32-20-2 (Motor, Pump End)

Water temperature	max. 70 °C
Suction head	max. 3 m

### Standards



Meets the requirements of:  
IEC/EN 61702:1995,  
IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

\*V<sub>mp</sub>: MPP-voltage under Standard Test Conditions (STC): 1000 W/m<sup>2</sup> solar irradiance, 25 °C cell temperature




# PS4000 CS-F32-20-2


## Solar Surface Pump System

### Pump Chart

V<sub>mp</sub>\* > 238 V

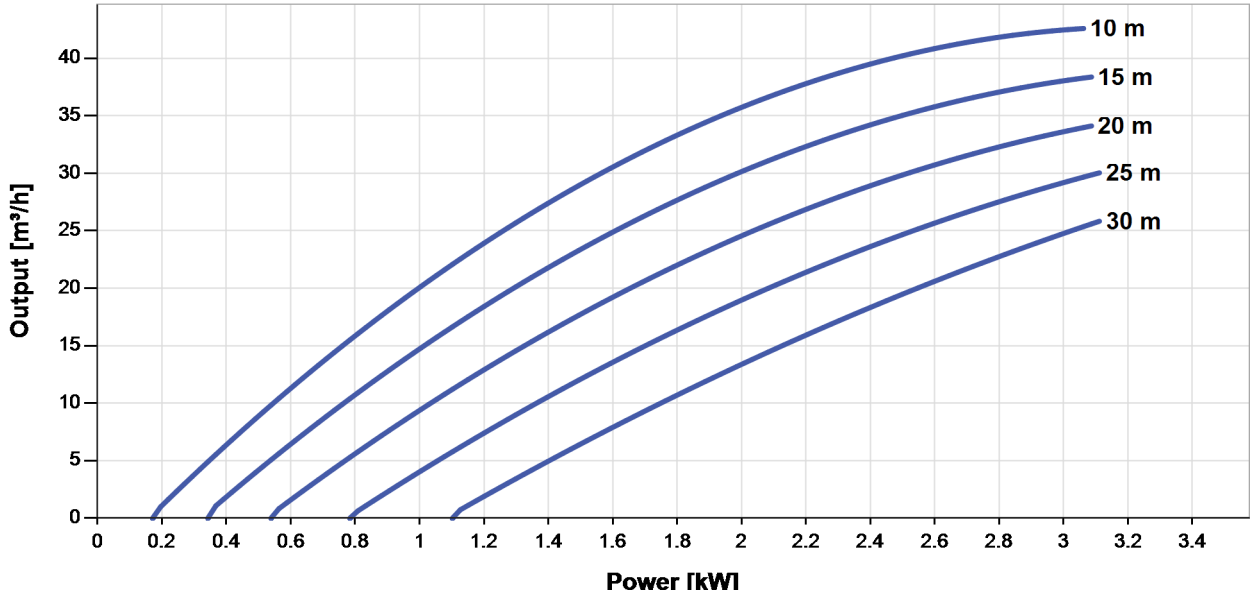

### NPSH

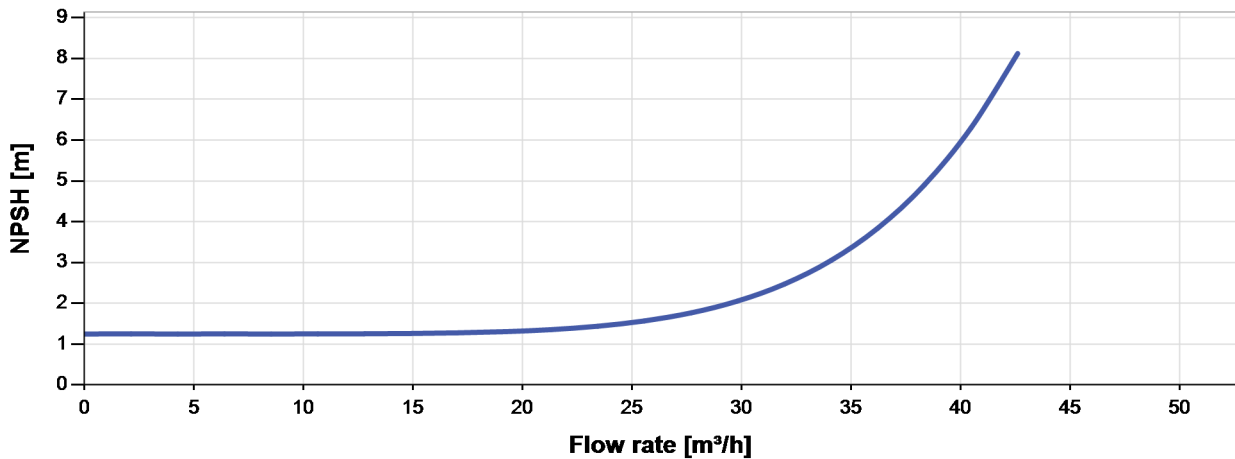

The NPSH (Net Positive Suction Head) is NOT the operating suction head. To calculate the operating suction head please refer to the installation manual.

\*V<sub>mp</sub>: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature




# PS4000 CS-F32-20-2

## Solar Surface Pump System

### Dimensions and Weights


#### Controller

H = 595 mm  
 H2 = 563 mm  
 W1 = 178 mm  
 W2 = 156 mm  
 W3 = 116 mm  
 D = 165 mm  
 D1 = 150 mm

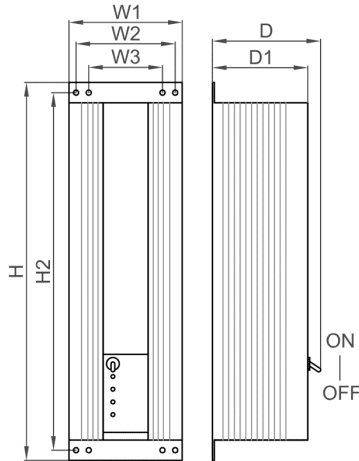

#### Pump Unit

A = 162 mm  
 B = 132 mm  
 C = 286 mm  
 D = 320 mm  
 E = 225 mm  
 F = 170 mm  
 G = 105 mm  
 H = 575 mm  
 I = G1/2"  
 J = 298 mm  
 K = 240 mm  
 L = 74 mm  
 M = 145 mm  
 N = 18 mm  
 O = 30 mm  
 P = 14 mm

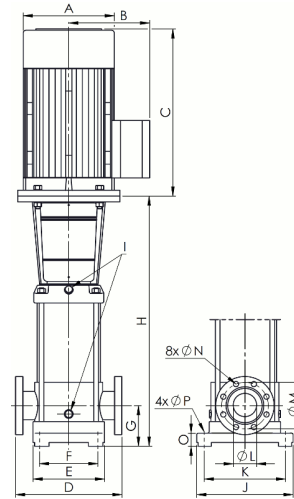

	Net weight
Controller	9,0 kg
Pump Unit	63 kg
Motor	15 kg
Pump End	48 kg

