

# **PS7k2 CS-F20-5**

# **Solar Surface Pump System**

## **System Overview**

max. 50 m Flow rate max. 33 m<sup>3</sup>/h

### **Technical Data**

#### Controller PS7k2

- Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracking)

Power max. 7,0 kW Input voltage max. 850 V Optimum Vmp\* > 575 V max. 10 A Motor current Efficiency max. 98 % Ambient temp. -30...50 °C IP54 Enclosure class

#### Motor AC DRIVE CS-F 5.5kW

- Highly efficient 3-phase AC motor
- Frequency: 25...50 Hz

Motor speed 1.400...2.850 rpm Power factor 0,84 Insulation class Enclosure class IPX4

### Pump End PE CS-F20-5

Premium materials

### Pump Unit PU CS-F20-5 (Motor, Pump End)

Water temperature max. 70 °C Suction head max. 3 m

## **Standards**

2006/42/EC, 2004/108/EC, 2006/95/EC

Meets the requirements of: IFC/FN 61702:1995 IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.






<sup>\*</sup>Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar iradiance, 25 °C cell temperature




# **PS7k2 CS-F20-5**

# **Solar Surface Pump System**

Pump Chart Vmp\* > 575 V

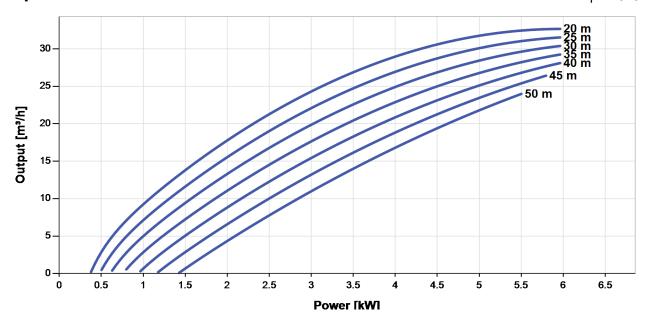

## **NPSH**

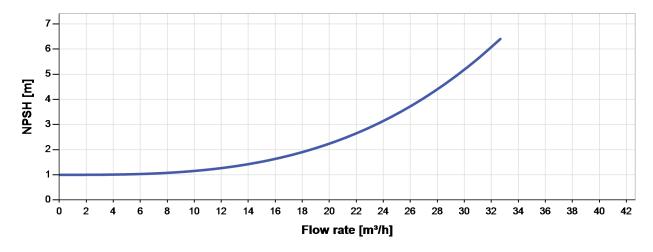

The NPSH (Net Positive Suction Head) is NOT the operating suction head. To calculate the operating suction head please refer to the installation manual.

\*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar iradiance, 25 °C cell temperature








# **PS7k2 CS-F20-5**

# **Solar Surface Pump System**

# **Dimensions and Weights**

#### Controller

H = 500 mmH1 = 450 mmH2 = 425 mmW1 = 320 mm W2 = 290 mm D = 9,0 mmD1 = 220 mm D2 = 250 mm

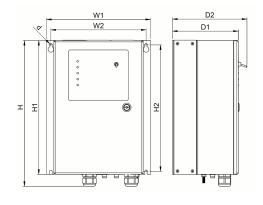


### **Pump Unit**

A = 260 mm B = 208 mmC = 430 mmD = 300 mm E = 199 mm F = 130 mmG = 90 mmH = 562 mm

I = G1/2" J = 247 mm K = 215 mm L = 50 mm

M = 125 mmN = 18 mmO = 35 mm P = 14 mm

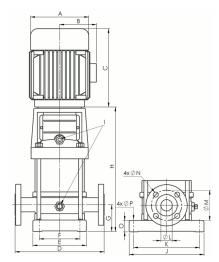

Net weight

Controller	17 kg
Pump Unit	76 kg
Motor	59 kg
Pump End	17 kg

